

QCK-4000

PNEUMATIC AND HAND TOOL INSTALLATION AND REMOVAL KIT


INSTRUCTIONS

1. Pneumatic and Hand Tool Installation:
Determine the fastener hex and pin recess size.
2. Pneumatic and Hand Tool Removal:
Determine the grip size needed.
Select the size of the hex tip.
3. For socket replacement rotate lock ring
in opposite direction of tool rotation to lock socket.

ZEPHYR[®]

TOOL

LOK-FAST

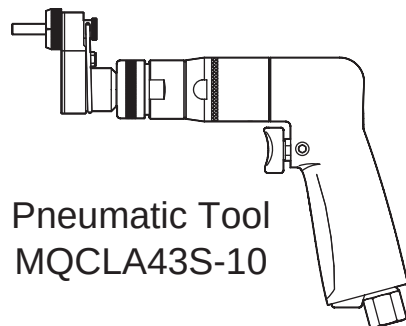


Quick Change Hand Installation Tool


Quick Change Hand Removal Tool

Removal Sockets


Installation Sockets

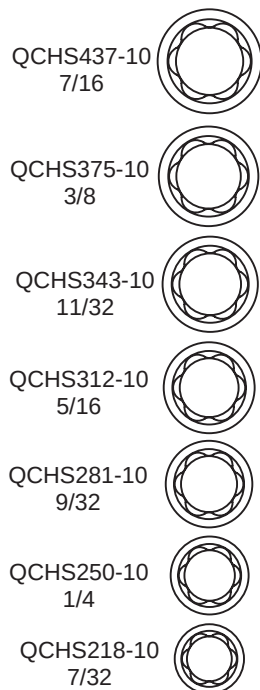

QCHA932

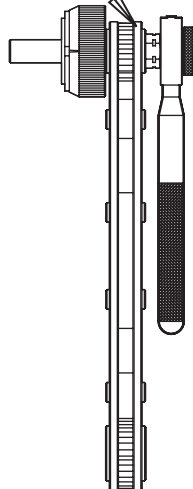

QCHRA932

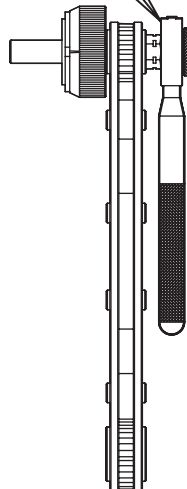

QCK-Hex Keys

