


QCK-4040

HAND TOOL INSTALLATION AND REMOVAL KIT




INSTRUCTIONS

1. Hand Tool Installation:
Determine the fastener hex and pin recess size.
2. Hand tool Removal:
Determine the grip size needed.
Select the size of the hex tip.
3. For socket replacement rotate lock ring
in opposite direction of tool rotation to lock socket.

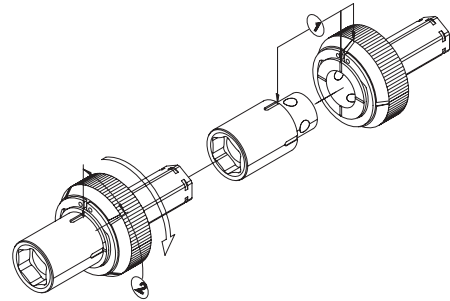



Quick Change Hand Installation Tool

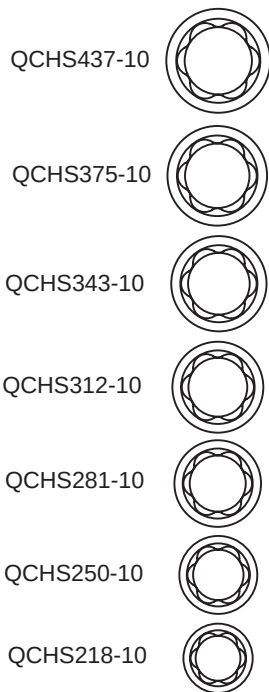

INSTALLATION
TOOL
QCHA932

Quick Change Hand Removal Tool

REMOVAL
TOOL
QCHRA932

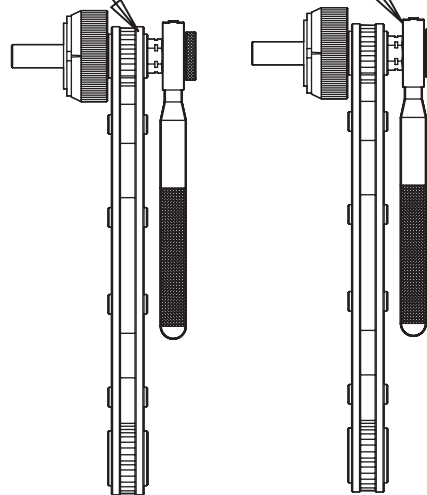

QRK-5 (QTY-2)
QRK-6 (QTY-2)
QRK-8 (QTY-2)
QRK-10 (QTY-2)

QCHR235-10
RANGE:.235-.255

QCHR245-10
RANGE:.245-.265

QCHR255-10
RANGE:.255-.275

QCHR265-10
RANGE:.265-.285

QCHR275-10
RANGE:.275-.295

QCHR285-10
RANGE:.285-.305

QCHR295-10
RANGE:.295-.315

QCHR305-10
RANGE:.305-.325

QCHR315-10
RANGE:.315-.335

QCHR325-10
RANGE:.325-.345

QCHR335-10
RANGE:.335-.355

QCHR355-10
RANGE:.355-.375

QCHR375-10
RANGE:.375-.395

QCHR395-10
RANGE:.395-.415



ZEPHYR Manufacturing Co., Inc

201 Hindry Avenue

Inglewood, CA 90301-1519

Tel. 310-410-4907 ■ Fax. 310-410-2913 ■ Email zephyr@zephyrtools.com ■ <http://www.zephyrtools.com>

Rev. 12/09